

# PTK 6878

Professional use

Yellow

## Characteristics


Water-based concentrated protector for the manufacture of light frame beams (formwork structures).

## Properties

- Colour identifying the beams
- Added value
- Antiadherent effect with concrete
- Avoids the partial absorption of water.
- Avoids the appearance and development of surface mould and fungi because of added humidities

## Colours

PTK 6878 is produced in a standard yellow colour but on request we can manufacture it in different colours. Please get in touch with our commercial department.

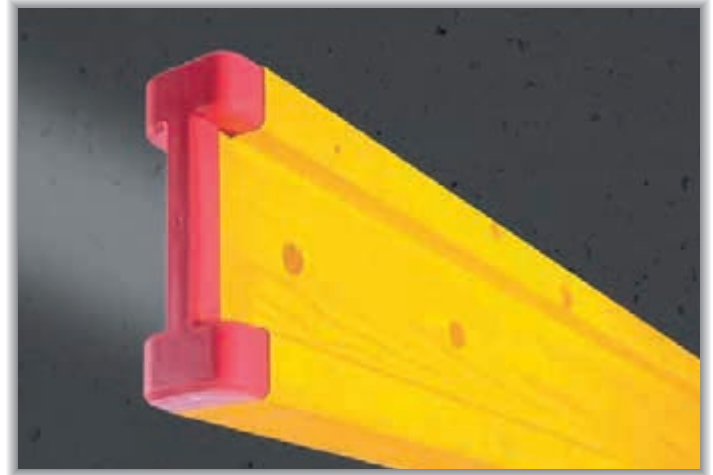

## Mode of use

This is a highly concentrated product which must be diluted in water for its application by means of painting tunnels, gun or absorption ponds.

Dose in water from proportion 1: 8 to 1:12.

Avoid using contaminated or putrefied waters to carry out the dilution mixtures.

## Physical and chemical properties

pH	7- 8
Viscosity	1.500 – 1.700 cP
Density	1,050 – 1,100 g/cm <sup>3</sup>
Scent	characteristic
Appearance/Colour	intense yellow



## Precautionary measures


Avoid contact with the skin and the inhalation of vapours. The safety measures generally recommended for handling chemicals must be adopted e.g. the use of protective clothing, goggles and protective gloves. The skin areas which have been in contact with the product will be washed immediately in plenty of soap and water for 15 minutes; if there is any contact with the eyes, rinse them immediately in plenty of water for 20 minutes and, where applicable, seek medical advice. Any contaminated or impregnated clothes must be changed immediately and replaced with clean ones. The instructions on the latest safety data sheet must be followed which contains additional information about labelling, carriage and storage as well as about handling, product safety, toxicity and its ecological behaviour.



## PAINT SCHEME TUNNEL\*

Advance direction of the wood →

\* It is also possible to replace the product spraying area with transmission cuvettes of FF 40/R and even rollers

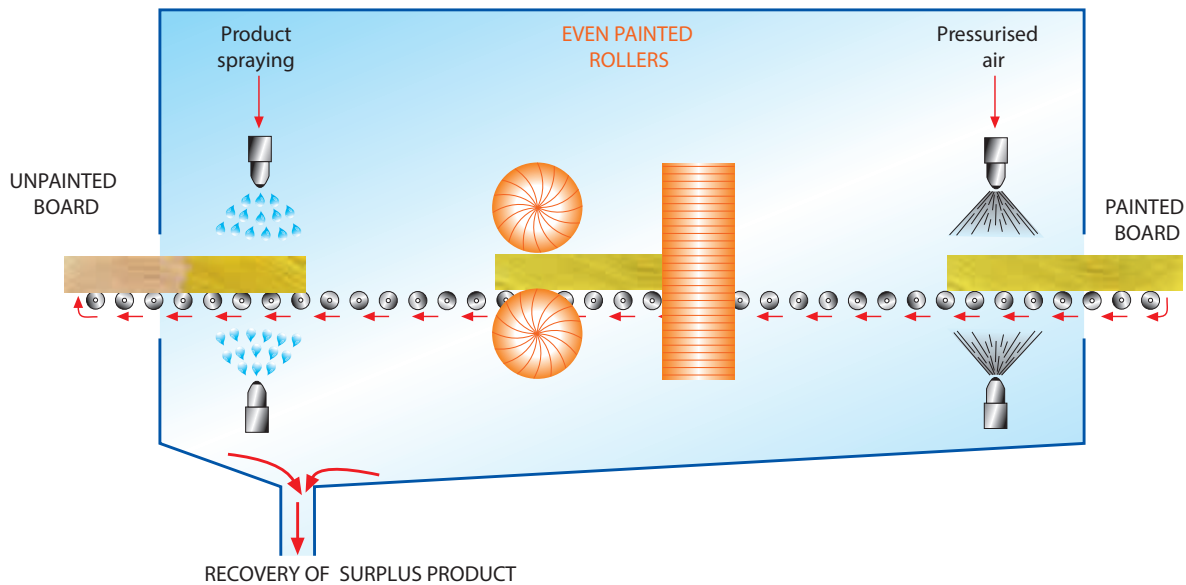

### Cleaning of tools and machinery

Fresh product. wash with water  
Dry remains: we recommend the use of our specific cleaner Proclean.

### Handling and Storage

PTK 6878 is a water-based concentrated protector for woods for structural formwork beams, notwithstanding the indications described on the product safety data sheet must be followed. Keep in closed recipients in well-ventilated areas, away from heat and ignition sources. Keep away from frosts.

### Packaging

Container 30 kg / pallet 18 drums  
Container 1000 kg

### Reach

All components have been pre-registered in accordance with the REACH standard on chemicals

### Additional information

The data contained in this technical data sheet is based on our current experience and, in any case, our technical department will always recommend the most appropriate dosage in each specific case after assessing the specific data thereof.

### Legal information

This information has been drawn up in line with the studies carried out by our technical department, as well as by laboratories and external technological institutes. And it seeks to facilitate product handling and knowledge, but it cannot be taken as an argument for any claim.  
Always use the chemicals safely . Always consult the label and the product information before its use.  
The technical data for the product contained in this technical data sheet may change without any prior notice.  
PTK reserves the right to make modifications to the technical data and the materials contained in this document without prior notice with a view to keeping up-to-date with technological progress and the new developments.

